




# LD SPRUNG AXLE ORDER FORM - LAND

<b>NOW OR ORDERED</b>	<b>SALES ORDER #</b>
<b>IBT PO NUMBER</b>	<b>INVOICE #</b>

Company	Salesman Initials	Date Ordered	Time
Name	Technician Initials	Date Needed	
Phone	Customer PO #	Time Needed	

Measured By  
 Iron Bear: Initials \_\_\_\_\_ AND \_\_\_\_\_ OR Customer: Phone \_\_\_\_\_ Axle Tag #: \_\_\_\_\_

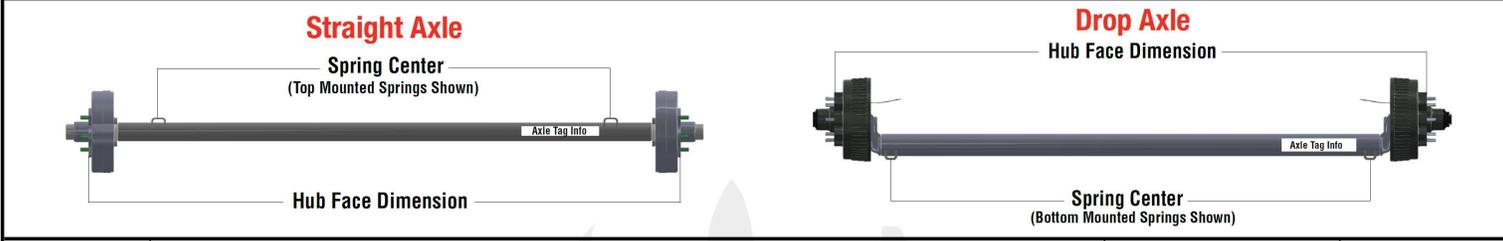

Quantity	2.2K	3.5K	Capacity	8K: Narrow	Straight or Drop	Type
1 2 3	4.4K	5.2K	7K - Standard	8K: 1/4" Wall	4" Drop <b>6" Drop</b> <small>3.5K only</small>	Beam Idler
4 5 6	6K	7.2K	<b>7K: 3" HW</b> <b>7K: 3.5" HW</b>	8K: HW <input type="checkbox"/>	Straight <input type="checkbox"/>	Brake <input type="checkbox"/>

ROUND TUBE ONLY Tube Diameter	Bearings	Flange	Brakes			Hub Face	Spring Center	Oversize HF 96"
1.75"    2.38" 3"    3.5" <input type="checkbox"/>	Timken Import <input type="checkbox"/>	Yes    No Measurement	Hyd-Disc	Manual	Air	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			Hyd-Drum	Hyd-Drum	FB			
			NEV'R Adjust <input type="checkbox"/>					

Bolt Pattern - 3.5K & Above	Studs/Nuts	Bolt Pattern - 2.2K	Cambered
5 on 4.5    5 on 4.75    5 on 5 5 on 5.5    655    865 <input type="checkbox"/>	1/2"    9/16"    5/8" Flange <b>5/8" Swivel</b> <b>5/8" Cone</b> <input type="checkbox"/>	<b>440</b> BT8/9-440 <b>545</b> 8-10" Wheel: BT8/9-545SF <b>545</b> 12-15" Wheel: BT8/9-545LF	Yes    No <input type="checkbox"/>

2.2K Spindle Upgrade	7K 5/8" Stud Upgrade	7K 5/8" Oil Upgrade	3.5K Idler Upgrade	3.5K Drum Upgrade
<b>#84 Upgrade</b>	<b>NOW</b> Grease: 008-219-18 Oil: 008-219-26 <input type="checkbox"/>	<b>ORD</b> Use Part No. <b>12DU (5/8")</b> <b>12DU-OIL (5/8" Oil)</b> <input type="checkbox"/>	<b>NOW</b> 845475    84550 84555    84655	<b>NOW</b> 845476    84556 84557    84656
			<b>ORD</b> Use Part No. <b>IU</b> <input type="checkbox"/>	<b>ORD</b> Use Part No. <b>10DU</b> <input type="checkbox"/>

Lubrication	Spring Pads		Basket Check
E-Z Lube    Oil <b>NEV'R Lube</b> Grease (solid caps) 092102: 2.2K & 3.5K    45896: 4.4K, 5.2K, 6K 38605: 7K, 7.2K, 8K <input type="checkbox"/>	Loose	Underslung (Springs Under) Overslung (Springs Over)	<b>Spring Pads Both</b> <input type="checkbox"/>

**Flange Measurements**

2.2K Hub Face = Outside of flanges + 6.90  
 3.5K Hub Face = Outside of flanges + 6.34  
 4.4K Hub Face = Outside of flanges + 7.08  
 5.2K, 6K, 7K Hub Face = Outside of flanges + 8.73  
 7.2K & 8K Narrow Hub Face = Outside of flanges + 7.54  
 8K Hub Face = Outside of flanges + 9.09

**Notes**

Ship LTL	Delivery Direction	U-Bolts	QTY	1	2	3
	North    East    South NE    West    Local	UBK-1.75S    UBK-1.75L    UBK-2.38S    UBK-2.38L UBK-3X1.75S (3-5 Leaf)    UBK-3X1.75L (6-7 Leaf) UBK-3X2S (3-5 Leaf)    UBK-3X2L (6-7 Leaf)    UBK-35				