




# LD DEXTER SPRUNG AXLE ORDER FORM - LAND

<b>NOW OR ORDERED</b>	<b>SALES ORDER #</b>
<b>IBT PO NUMBER</b>	<b>INVOICE #</b>
Company _____	Salesman Initials _____ Date Ordered _____ Time _____
Name _____	Technician Initials _____ Date Needed _____
Phone _____	Customer PO # _____ Time Needed _____
Measured By Iron Bear: Initials _____ AND _____ OR _____ Customer: Phone _____ Axle Tag #: _____	

### Straight Axle

### Drop Axle

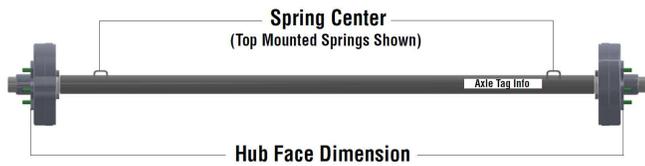

<b>Quantity</b>	2.2K 3.5K	3.5K 5.2K	4.4K 5.2K	6K 7.2K	<b>Capacity</b>	<b>8K: Narrow</b>	<b>Straight or Drop</b>	<b>Type</b>	
1 2 3					7K - Standard	8K: 1/4" Wall	4" Drop <b>6" Drop</b> <small>3.5K only</small>	Beam Idler	
4 5 6					7K: <b>3" HW</b> 7K: <b>3.5" HW</b>	8K: <b>3.5" HW</b> <input type="checkbox"/>	Straight <input type="checkbox"/>	Brake <input type="checkbox"/>	
<b>ROUND TUBE ONLY</b>	<b>Bearings</b>	<b>Flange</b>	<b>Brakes</b>		<b>Hub Face</b>	<b>Spring Center</b>	<b>Oversize HF 96"</b>		
<b>Tube Diameter</b>	Timken	Yes No	Hyd-Disc	Manual					
1.75" 2.38"	Import <input type="checkbox"/>	Measurement	Hyd-Drum	Hyd-Drum FB	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
3" 3.5" <input type="checkbox"/>			NEV'R Adjust <input type="checkbox"/>						
<b>Bolt Pattern - 3.5K &amp; Above</b>			<b>Studs/Nuts</b>			<b>Bolt Pattern - 2.2K</b>			<b>Cambered</b>
5 on 4.5	5 on 4.75	5 on 5	1/2"	9/16"	5/8" Flange	<b>440</b>	<b>545</b>	<b>545</b>	Yes No
5 on 5.5	655	865 <input type="checkbox"/>	<b>Nut Upgrade</b>			BT8/9-440	8-10" Wheel: BT8/9-545SF	12-15" Wheel: BT8/9-545LF <input type="checkbox"/>	<input type="checkbox"/>
			5/8" Swivel OR 5/8" Cone <input type="checkbox"/>						
<b>2.2K Spindle Upgrade</b>	<b>7K 5/8" Stud Upgrade</b>	<b>7K 5/8" Oil Upgrade</b>	<b>3.5K Idler Upgrade</b>		<b>3.5K Drum Upgrade</b>				
<b>#84 Upgrade</b>	<u>NOW</u> Grease: 008-219-18	<u>ORD</u> Use Part No.	845475	84550	<u>NOW</u>	<u>ORD</u>	845476	84556	Use Part No.
	Oil: 008-219-26 <input type="checkbox"/>	12DU (5/8") 12DU-OIL (5/8" Oil) <input type="checkbox"/>	84555	84655		No. <b>IU</b> <input type="checkbox"/>	84557	84656	<b>10DU</b> <input type="checkbox"/>
<b>Lubrication</b>			<b>Spring Pads</b>						
E-Z Lube	Oil	<b>NEV'R Lube</b>	Loose <input type="checkbox"/>		Underslung (Springs Under)	Overslung (Springs Over)	<b>Spring Pads Both</b>		Basket Check
	Grease (solid caps)								<input type="checkbox"/>
092102: 2.2K & 3.5K		45896: 4.4K, 5.2K, 6K							
		38605: 7K, 7.2K, 8K							

### Flange Measurements

2.2K Hub Face = Outside of flanges + 6.90  
 3.5K Hub Face = Outside of flanges + 6.34  
 4.4K Hub Face = Outside of flanges + 7.08

5.2K, 6K, 7K Hub Face = Outside of flanges + 8.73  
 7.2K & 8K Narrow Hub Face = Outside of flanges + 7.54  
 8K Hub Face = Outside of flanges + 9.09

### Notes

<b>Ship LTL</b>	<b>Delivery Direction</b>	<b>U-Bolts</b>	<b>QTY 1 2 3</b>
	North East South NE West Local	UBK-1.75S UBK-1.75L UBK-3X1.75S (3-5 Leaf) UBK-3X175S.5 UBK-3X2S (3-5 Leaf)	UBK-2.38S UBK-2.38L UBK-3X1.75L (6-7 Leaf) UBK3X175L.5 UBK-3X2L (6-7 Leaf)

*\*Bold & Italics indicate Upgrades/Additional Charges\**